


VERTICAL BLIND SYSTEMS

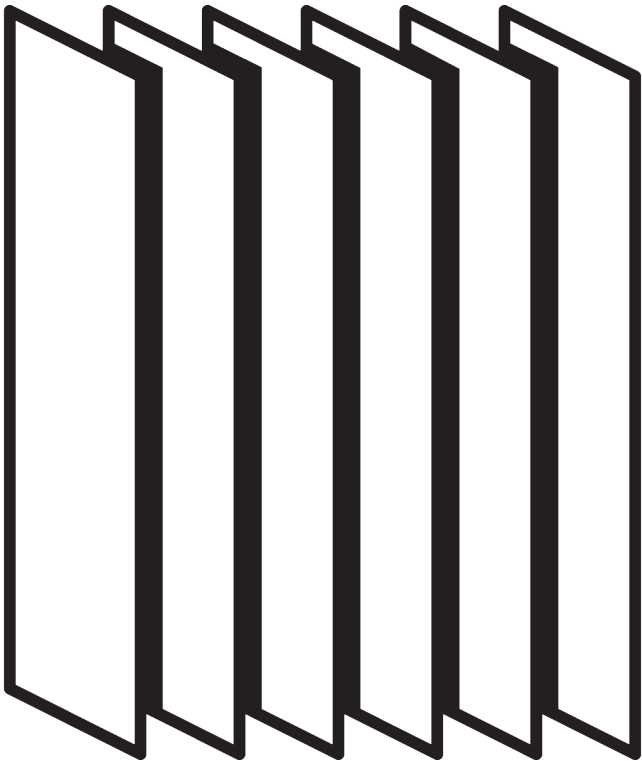

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, etc.).
- Recommended distance floor / fabric: 20 mm.
- In order to determine system height (B), the smallest room height must be taken into account.

Fitting

- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!


Child Safety

- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.

APPLICATION CHART

<u>PAGE</u>	<u>SYSTEM</u>	<u>OPERATION</u>	<u>DIMENSION</u>	← max. →	↑ max. ↓	kg _{max.}
5	SG 2810		S - M	5 m	4 m	0.2 kg

SG 2810

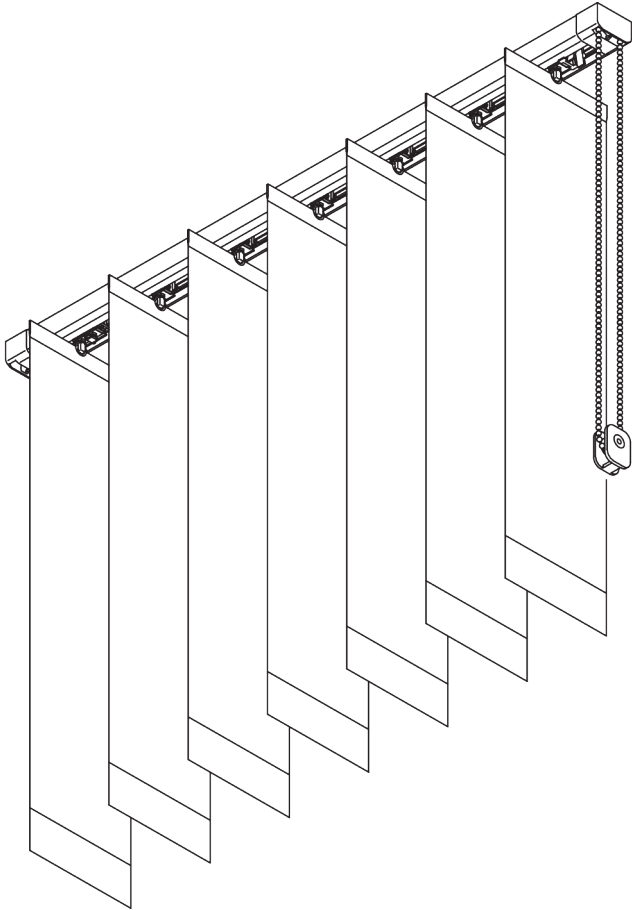

PRODUCT INFORMATION

- **Operation:** chain
- **Range:** S - M
- **Fitting:** ceiling, wall, recess
- **Colours:** white RAL 9016 or anodised aluminum, special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection

Features:

- Optimised light control
- Mono controlled
- Pull override protection
- Louvre width: 127 mm (standard), 89 mm
- Vertical Waves
- Bendable

SYSTEM SPECIFICATIONS

A. SYSTEM DIMENSIONS

127 mm louvres: 5 m 89 mm louvres: 3.8 m	40 cm	4 m	200 g per louvre

Max. system widths

	127 mm 89 mm	5 m 3.8 m
	127 mm 89 mm	4 m 3.1 m
	127 mm 89 mm	4 m 3.1 m


Stack sizes

		100	150	200	250	300	350	400	450	500
127 mm		27	35	42	50	57	65	72	80	87
		21	25	28	32	36	39	43	47	50
89 mm		29	40	50	60	69	80			
		20	25	30	35	39	45			

(cm)


B. PROFILE

Profile and bending information



SG 2601

Profile




SG 2614

Recess profile




Radius:
>75 cm

C. HOW TO MEASURE

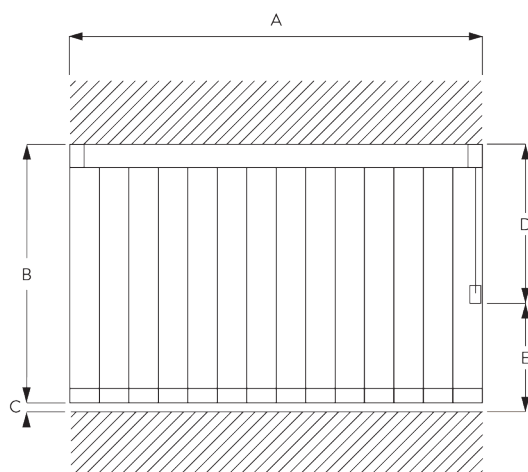

A: System width
B: System height
C: Distance between floor and fabric
D: Chain height
E: Safety retainer SG 10731 min. 150 cm above floor

Light gap



D. SPECIFICATION TEXT

EN

Silent Gliss SG 2810 Chain Operated Vertical Blind System. Comprises aluminium profile SG 2601 supplied made to measure powder coated white or silver anodised. Assembled complete with mono control chain SG 2872 and rotation elements to suit louvre width 127 mm SG 2623 / 89 mm SG 2625. Top fixed with clamp SG 2616 at max 300 mm centres + 1. Wall fixed with bracket SG 2616 in conjunction with SG Smart Fix Recess fixed option with recess profile SG 2614 and wedges SG 5118. Fabric supplied from Silent Gliss fabric range.

SV

Silent Gliss SG 2810 Lamellsystem med kedja. Innefattar aluminium profil SG 2601 i kundmått, pulverlackerad i vitt eller i alu finish. Monterad komplett med mono kontroll kedja SG 2872 och pivåer för lamellbredd 127 mm SG 2623 / 89 mm SG 2625. Takmontering med fäste SG 2616 c/c 300 mm. + 1. Veggmontering med fäste SG 2616 samt Smart Fix vinklar. Infällningsmöjlighet med profil SG 2614 och kilar SG 5118. Textil från Silent Gliss textilprogram prisgrupp 1-4.

NO

Silent Gliss SG 8300 Lamellsystem med kjede. Leveres på ønsket mål. Består av aluminiumsprofil SG 2601, pulverlakkert i hvit eller i alu finish. Montert komplett med mono betjeningskjede SG 2872, rotasjonselement tilpasset lamellbredde 127 mm SG 2323 / 89 mm SG 2625. Takmontering med feste SG 2616 c/c 300 mm. +1. Veggmontering med feste SG 2616, samt Smart Fix vinkler. Innfellingsmulighet med profil SG 2614 og kile SG 5118. Tekstil fra Silent Gliss tekstilkolleksjon 1-4.

DA


Silent Gliss SG 2810 lodret rullegardinsystem med kædestyring. Består af aluminiumprofil SG 2601 i ønsket længde, i hvid pulverlakering eller sølvanodiseret. Helt samlet med styrekæde SG 2872 og rotationselementer passende til lamelbredde 127 mm SG 2623 / 89 mm SG 2625. Loftmonteres med klemme SG 2616 med højst 300mm afstand + 1. Vægmonteres med beslag SG 2616 i sammenhæng med SG Smart Fix indfældning fast tilbehør med indfældningsprofil SG 2614 og kiler SG 5118. Stoffet leveres fra Silent Gliss stofprogrammet.

FITTING

A. FITTING INFORMATION


Fixing points

For detailed fitting information, visit the Silent Gliss website.



B. CEILING FITTING

Bracket SG 2616

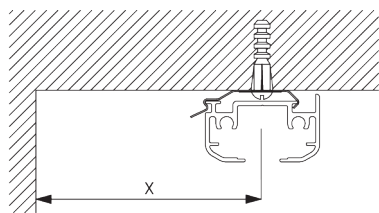


SG 2616

Bracket


Min. wall distance louver	X mm
89 mm	65
127 mm	85
Vertical Waves 89 mm	115
Vertical Waves 125 mm	140

C. RECESS FITTING

Recess profile SG 2615




Recess profile SG 2615 can not be bent!
One wedge SG 5118 per fixing point.
For detailed recess fitting, visit the Silent Gliss website.



SG 2615

Recess profile




SG 5118

Wedge

Min. wall distance louver	X mm
89 mm	65
127 mm	85
Vertical Waves 89 mm	115
Vertical Waves 125 mm	140


D. WALL FITTING

Smart Fix




Smart Fix SG 11201 - SG 11204 and bracket SG 2616:

Screw SG 10395 (M4x6) needed



Square Smart Fix SG 11211 - SG 11214 and bracket SG 2616:


Screw SG 10395 (M4x6) needed

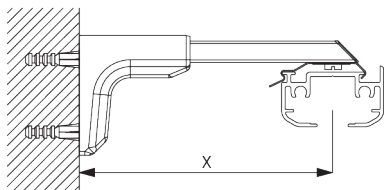

Universal Smart Fix SG 11154 - SG 11156 and bracket SG 2616:

Screw SG 10492 (M4x8) needed

Smart Fix	X mm
SG 11201 / SG 11211	72
SG 11202 / SG 11212	92
SG 11203 / SG 11213	112
SG 11204 / SG 11214	142
SG 11154	102-130
SG 11155	132-160
SG 11156	182-210
Min. wall distance louvres	
89 mm	65
127 mm	85
Vertical Waves 89 mm	115
Vertical Waves 125 mm	140



SG 2616

Bracket




SG 10395

Pan head screw M4x6




SG 10492

Pan head screw M4x8




SG 11201

Smart Fix 80 mm




SG 11202

Smart Fix 100 mm




SG 11203

Smart Fix 120 mm




SG 11204

Smart Fix 150 mm




SG 11211

Square Smart Fix 80 mm




SG 11212

Square Smart Fix 100 mm




SG 11213

Square Smart Fix 120 mm




SG 11214

Square Smart Fix 150 mm




SG 11154

Universal Smart Fix 120 mm






SG 11155
Universal Smart Fix 150 mm




SG 11156
Universal Smart Fix 200 mm

SYSTEM OPTIONS

A. VERTICAL WAVES

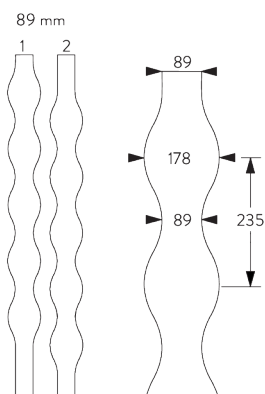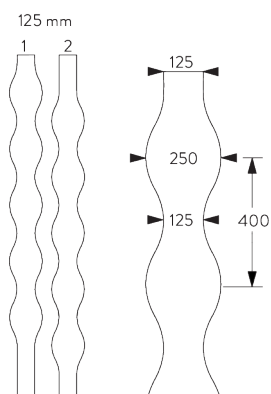


3D Vertical Waves only applicable with 125 mm louvres.

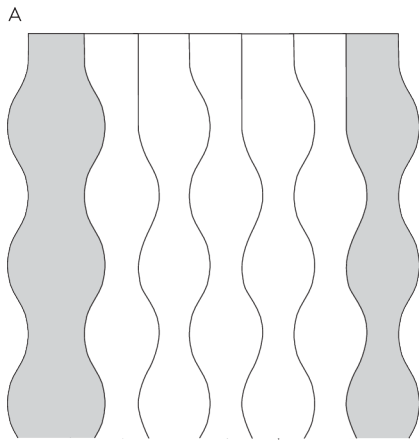


Wall ending

A: Wavy edge

B: Straight edge

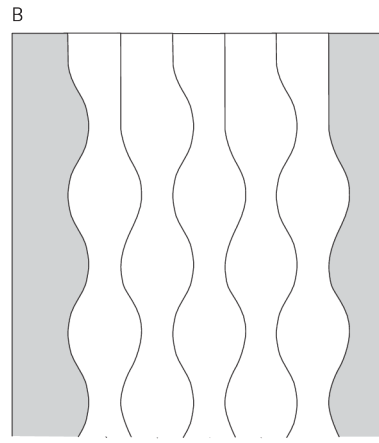


B. STACKING VARIATIONS



A: Single stack in one direction



B: Pair stack in two directions symmetrical



C: Pair stack in one direction asymmetrical














D: Pair stack in two directions asymmetrical

E: Multiple stacking in one direction symmetrical or asymmetrical












F: Centre stack







PARTS

A. STANDARD PARTS

	SG 2601 Profile
	SG 2604 Guide
	SG 2610 End stop
	SG 2611 Stopper
	SG 2612 Brake
	SG 2616 Bracket
	SG 2620 Pilot runner
	SG 2623 Rotation element set 127 mm
	SG 2627 Cover
	SG 2865 Bead chain connector ø 4.6 mm
	SG 2872 Bead chain plastic ø 4.6 mm
	SG 10731 Child safety retainer set

B. OPTIONAL PARTS

	SG 2608 End stop
	SG 2615 Recess profile
	SG 2618 Shaft
	SG 2624 Rotation element set 100 mm
	SG 2625 Rotation element set 89 mm
	SG 3340 Cord/chain weight
	SG 5118 Wedge
	SG 10395 Pan head screw M4x6
	SG 10492 Pan head screw M4x8
	SG 11154 Universal Smart Fix 120 mm
	SG 11155 Universal Smart Fix 150 mm
	SG 11156 Universal Smart Fix 200 mm
	SG 11201 Smart Fix 80 mm
	SG 11202 Smart Fix 100 mm

	SG 11203 Smart Fix 120 mm
	SG 11204 Smart Fix 150 mm
	SG 11211 Square Smart Fix 80 mm
	SG 11212 Square Smart Fix 100 mm
	SG 11213 Square Smart Fix 120 mm
	SG 11214 Square Smart Fix 150 mm

The Architects of Silence

Silent Gliss is the leading global supplier of premium interior window treatments. Since 1952 we have been tirelessly committed to the development of the worlds` smoothest, quietest systems using state of the art technology.

Driven by customer needs, Silent Gliss offers functional and durable products. Expert technical advice coupled with installation and support services complete the offer. Silent Gliss stands for innovative, sustainable, tailor made solutions, exceptional design and first-class quality.

Silent Gliss Nordic AB

Box 9008

213 77 Malmö

Sweden

T +46 40 55 52 50

info@silentgliss.se

Bygdøy Allé 111A

0273 Oslo

Norway

T +47 24 11 80 60

info@silentgliss.no

Denmark

T +45 36 77 67 00

info@silentgliss.dk

silentgliss.se

silentgliss.no

silentgliss.dk